

**CASSIDA**

## Single-Point Automatic Lubricators



LUBRICANTS.  
TECHNOLOGY.  
PEOPLE.



**MOVING YOUR WORLD**



# CASSIDA Automatic Lubricators

CASSIDA automatic lubricators are devices that can be programmed to apply lubricant (grease or oil) automatically. In most cases, the equipment can continue to operate during lubricant application, which reduces downtime.

Investing in automatic lubricators always results in savings and reduced maintenance costs in the long run, because lubricant consumption is optimised. In addition, these devices eliminate the cost and risk involved in manually applying controlled amounts of lubricant to multiple sites at frequent intervals while the equipment is in operation. Hygienic design considerations are also improved by the use of automatic lubricators, as they provide a means of achieving clean lubrication, by preventing leaks and spills that might otherwise contaminate products. Automated lubrication provides constant protection against the ingress of contaminants through lubrication points, preventing water, dirt and dust ingress, which leads to longer equipment service life.

In short, automatic lubricators simplify equipment lubrication and provide a level of homogeneity resulting in benefits that include:

- Reduced maintenance costs
- Improved labour efficiency and cost savings
- Greater safety for personnel during maintenance tasks
- Reduced equipment downtime
- Longer equipment service life
- Optimal and homogeneous lubrication guaranteed
- Reliable lubrication vs. human error when applying manually
- Improved hygienic design and food safety by minimising residue

To achieve all these benefits, FUCHS offers its customers the full CASSIDA product range in automatic lubricators for STAR VARIO BLUETOOTH, STAR CONTROL and FLEX systems.



STAR VARIO BLUETOOTH



STAR CONTROL



FLEX

## CASSIDA STAR VARIO BLUETOOTH

**CASSIDA STAR VARIO BLUETOOTH** operates fully automatically, regardless of temperature and back pressure, discharging with extreme precision.

The system consists of an electromechanical motor, an LC (Lubricant Cartridge) unit containing 60 cm<sup>3</sup>, 120 cm<sup>3</sup>, 250 cm<sup>3</sup> or 500 cm<sup>3</sup> of lubricant and batteries.

The desired discharge interval and LC size are easily selected via the set button and are immediately shown on the LCD display. The current operating status is always shown by an LED signal (green / red), which is visible even from a distance, and also on the LCD display.

This single-point lubricator can be controlled remotely via Bluetooth, using mobile device app.



## CASSIDA STAR CONTROL

The main difference between the **CASSIDA STAR CONTROL** and the **STAR VARIO BLUETOOTH** model is that the drive is powered externally via a connection cable and therefore no batteries are required.

**CASSIDA STAR CONTROL** also has an electromagnetic drive with two built-in operating modes: TIME and IMPULSE.

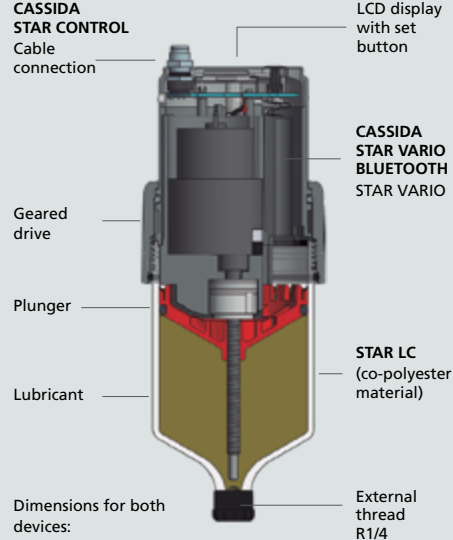

In TIME mode, **CASSIDA STAR CONTROL** applies lubrication according to the programmed discharge time (1, 2, 3 ... 12 months).

In IMPULSE mode, the device applies the exact amount of lubricant when power is detected on starting up the machinery. This mode is particularly recommended for machinery that operates intermittently.




A further advantage is that service status can be transmitted and assessed in a PLC.



## Technical information

<p><b>Reusable electromechanical drive</b>  <b>CASSIDA STAR VARIO BLUETOOTH</b> with batteries  <b>CASSIDA STAR CONTROL</b> with external power: 9 - 30 V DC, I<sub>max</sub> 0.5 A</p> <p><b>Discharge time</b>  1, 2, 3... 12 months for both devices  <b>CASSIDA STAR CONTROL:</b>  Time-based control (TIME)  Impulse-based control (TIME)</p> <p><b>Lubricant amount</b>  60 cm<sup>3</sup>, 120 cm<sup>3</sup>, 250 cm<sup>3</sup> or 500 cm<sup>3</sup></p> <p><b>Application temperature</b>  <b>CASSIDA STAR VARIO BLUETOOTH:</b>  -20 °C to +60 °C  <b>CASSIDA STAR CONTROL:</b>  -40 °C to +60 °C</p> <p><b>Operating pressure</b>  7.5 bar</p> <p><b>Protection class</b>  IP 65 for both devices</p> <p><b>Lubricant up to NLGI 2 / oils</b>  For both devices</p>	 <p><b>CASSIDA STAR CONTROL</b> Cable connection</p> <p>LCD display with set button</p> <p><b>CASSIDA STAR VARIO BLUETOOTH</b> STAR VARIO</p> <p>Geared drive</p> <p>Plunger</p> <p>Lubricant</p> <p><b>STAR LC</b> (co-polyester material)</p> <p>External thread R1/4</p> <p>Dimensions for both devices:  LC 60: Ø 75 x 155 mm  LC 120: Ø 75 x 178 mm  LC 250: Ø 75 x 228 mm  LC 500: Ø 72 x 329 mm</p>	 <p><b>CASSIDA STAR VARIO BLUETOOTH</b> Protective cover for extreme conditions of use</p> <p>Drive incl. protection cover  <b>Setting: 1, 2, 3... 12 months</b>  Other variants on request</p> <p><b>CASSIDA STAR VARIO BLUETOOTH</b> STAR VARIO</p> <p><b>CASSIDA STAR CONTROL</b> 5m and 10 m connection cable</p> <p><b>STAR LC 60, 120, 250, 500 cm<sup>3</sup></b></p> <p>STAR support</p>
---	--	--

## Product features and benefits

	<p><b>The LCD display with set button</b> shows discharge interval, LC size and operating status  <b>Setting: 1, 2, 3... 12 months</b> and LC size</p>	<ul style="list-style-type: none"> <li>• Simple and intuitive handling</li> <li>• Precise, customised adjustment avoids under- or over-lubrication</li> <li>• Changes to the settings can be made at any time</li> <li>• Can be switched off in the event of a long-term plant shutdown</li> </ul>
	<p><b>Reusable electromechanical drive STAR VARIO BLUETOOTH</b> with batteries  <b>STAR CONTROL</b> cable connection  <b>Always-visible LED (green/red)</b> shows operating status and incidents</p>	<ul style="list-style-type: none"> <li>• Reliable and precise lubrication, regardless of room temperature and back pressure</li> <li>• One-time acquisition cost</li> <li>• Quick operation control through LED signals saves time and makes maintenance easier</li> <li>• <b>STAR VARIO BLUETOOTH</b> can be controlled remotely with a mobile device</li> <li>• <b>STAR CONTROL</b> can be connected to a PLC</li> </ul>
	<p><b>The 7.5 bar pressure generated allows for mounting at a distance of up to 5 m.</b>  <b>Additional manual discharge at the push of a button (purge)</b></p>	<ul style="list-style-type: none"> <li>• Mounting outside hazard areas or in easy-access areas increases safety at work</li> <li>• Increased availability of the equipment, as the LC change can be carried out smoothly during service</li> <li>• If necessary, the lubrication point can be purged to remove blockages</li> </ul>

Lubricator accessories can be ordered separately according to your needs.

## Accessories



### DRIVE

**Description:**  
Geared drive.  
5 years' service life.

**Retail packaging:**  
1 pc.



### SUPPORT FLANGE

**Description:**  
Lubricator support for first installation.  
5 years' service life.

**Retail packaging:**  
1 pc.



### BATTERY PACK

**Description:**  
Battery pack for power supply in CASSIDA STAR VARIO BLUETOOTH devices.  
Change with each lubricant cartridge replacement (LC).

**Retail packaging:**  
Pack of 3 batteries.



### CABLE FOR STAR CONTROL

**Description:**  
4-wire connection cable for CASSIDA STAR CONTROL devices.

**Retail packaging:**  
1 pc.

## CASSIDA Cartridges



### CASSIDA STAR LC 60

**Description:**  
60 cm<sup>3</sup> Replacement Lubricant Cartridge (LC).

**Items included:**  
STAR LC 60.

**Retail packaging:**  
Box of 10 pcs.



### CASSIDA STAR LC 120

**Description:**  
120 cm<sup>3</sup> Replacement Lubricant Cartridge (LC).

**Items included:**  
STAR LC 120.

**Retail packaging:**  
Box of 10 pcs.



### CASSIDA STAR LC 250

**Description:**  
250 cm<sup>3</sup> Replacement Lubricant Cartridge (LC).

**Items included:**  
STAR LC 250.

**Retail packaging:**  
Box of 10 pcs.

## CASSIDA FLEX

CASSIDA FLEX is a compact, ready-to-use lubrication system delivered as a complete unit. It can be used in a wide range of applications at temperatures from  $-20\text{ }^{\circ}\text{C}$  to  $+60\text{ }^{\circ}\text{C}$ . The discharge interval can be freely selected from between 1 and 12 months.

The required pressure is achieved by means of an electronically controlled chemical reaction. Fresh lubricant is continuously applied to the lubrication point throughout the selected discharge interval.

CASSIDA FLEX is available in  $60\text{ cm}^3$  and  $125\text{ cm}^3$  sizes.



## Technical information

### Operation

**Electrochemical reaction.  
Gas generation.**

Discharge interval at  $+20\text{ }^{\circ}\text{C}$  /  
perma multipurpose grease SF01  
**1, 2, 3... 12 months**

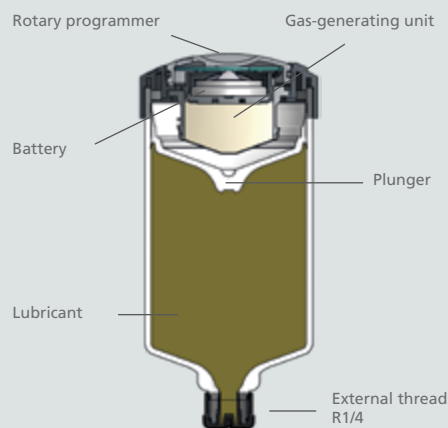
Lubricant volume  
 **$60\text{ cm}^3$  or  $125\text{ cm}^3$**

Application temperature  
 **$-20\text{ }^{\circ}\text{C}$  to  $+60\text{ }^{\circ}\text{C}$**

Operating pressure  
**Max. 5 bar**

Protection class  
**IP 68**

Special and standard lubricants  
**Greases up to NLGI 2 / oils**



Dimensions:  
FLEX 60:  $\text{Ø } 58 \times 86.5\text{ mm}$   
FLEX 125:  $\text{Ø } 58 \times 117\text{ mm}$

### Setting the discharge interval in months:

Guideline values  
for back-pressure  
free discharge with  
NLGI 2 lubricant.




At temperatures  
from  $> -60\text{ }^{\circ}\text{C}$  and  
with discharge  
intervals of  $> 6$   
months, lubricant  
may remain  
undelivered.



	1	2	6	9	12
at $-20\text{ }^{\circ}\text{C}$	2	5	10	13	15
at $0\text{ }^{\circ}\text{C}$	1.3	3.8	7.2	11	13
at $+20\text{ }^{\circ}\text{C}$	1	3	6	9	12
at $+40\text{ }^{\circ}\text{C}$	0.8	2.5	5.2	7.5	10
at $+60\text{ }^{\circ}\text{C}$	0.6	2	4	-	-



## Features and Benefits

	<p><b>Complete system with rotary timer to adjust the discharge interval:</b> 1, 2, 3... 12 months</p>	<ul style="list-style-type: none"> <li>• The system is delivered fully assembled and ready for immediate use</li> <li>• Easy setting and activation via rotary timer</li> <li>• Discharge time adjustable from 1 to 12 in monthly intervals</li> </ul>
	<p><b>The system operates reliably between -20 °C and +60 °C.</b></p>	<ul style="list-style-type: none"> <li>• Flexible use in various temperature ranges</li> <li>• Can be used outdoors all year round</li> </ul>
	<p><b>Ex protection approval</b> <b>FM approval</b> <b>IP 68</b></p>	<ul style="list-style-type: none"> <li>• Safe and permanent lubrication in explosion-hazard areas</li> <li>• Can be used in high-humidity or dusty environments</li> <li>• Increased safety at work</li> </ul>

## CASSIDA automatic lubricators



### CASSIDA FLEX 60

**Description:**  
60 cm<sup>3</sup> automatic lubrication system.

**Retail packaging:**  
Box of 10 pcs.



### CASSIDA FLEX 125

**Description:**  
120 cm<sup>3</sup> automatic lubrication system.

**Retail packaging:**  
Box of 10 pcs.

## Accessory kit for distance installation

Direct mounting is recommended in order to reduce lubricant pressure on the lubrication point. However, in many cases, remote installation is required, especially when lubrication points are located in high temperature zones (>60 °C), inaccessible areas or where there is a high risk of accidents (vibration, shocks, cuts, etc.).

The following accessories are required to install CASSIDA automatic lubricators at a distance from the lubrication point. Please note that the maximum distance is 5 m for STAR VARIO BLUETOOTH and STAR CONTROL systems and 2 m for the FLEX system in order to keep the proper operating pressure.

### INSTALLATION KIT FOR SINGLE-POINT LUBRICATORS WITH OIL

**Description:**

Accessory kit for remote installation of automatic lubricators containing oil (CASSIDA STAR LC or CASSIDA FLEX)

**Items included:**

8 accessories and spare parts

**Retail packaging:**

Box with accessory kit

Item name	Quantity	Image
STAR Bracket (inox.) G1/4	1 pcs	
Mounting Clamp 65 mm (inox.)	1 pcs	
Straight G1/4" nickel-plated brass connector for e8mm / i6mm hose.	2 pcs	
PA hose, 8 mm outside diameter, -40 a to +80 °C	3 m	
90° elbow G1/4e x G1/4i, brass	1 pcs	
Oil check valve G1/4e xG1/4i Up to 60 °C (brass / plastic)	2 pcs	
Brush bracket (stainless steel)	1 pcs	
Brush Ø20 mm G1/4	1 pcs	

### INSTALLATION KIT FOR SINGLE-POINT LUBRICATORS WITH GREASE

**Description:**

Accessory kit for remote installation of automatic lubricators containing grease (CASSIDA STAR LC or CASSIDA FLEX)

**Items included:**

8 accessories and spare parts

**Retail packaging:**

Box with accessory kit

Item name	Quantity	Image
STAR Bracket (inox.) G1/4	1 pcs	
Mounting Clamp 65 mm (inox.)	1 pcs	
Straight G1/4" connector for e8mm / i6mm hose, nickel-plated brass	2 pcs	
PA hose, 8 mm outside diameter, -40 a to +80 °C	3 m	
90° elbow G1/4e x G1/4i, brass	1 pcs	
Pipe adaptor G1/8e x G1/4i, brass	1 pcs	
Pipe adaptor G1/M8x1e x G1/4i, brass	1 pcs	
Pipe adaptor G1/M10x1e x G1/4i, brass	1 pcs	

**CASSIDA**

**Single-Point Automatic Lubricators**

## **Developing custom lubrication solutions for the most demanding challenges**

Our international team of experts from all sectors and industries works solely on lubrication solutions so that our customers can focus on their business.

It is our mission to ensure that we deliver technology that provides them with benefits and improves the sustainability of their processes.

Our engineering team is at your service!

Contact person:



**FUCHS LUBRICANTES, S.A.U.**  
c/ Ferralla, 27  
Pol. Industrial San Vicente  
08755 Castellbisbal - Barcelona

[info.es@fuchs.com](mailto:info.es@fuchs.com)  
[www.fuchs.com/es](http://www.fuchs.com/es)

**CUSTOMER SERVICE DEPT. (DAC)**  
Tel. +34 935 475 859  
[info.es@fuchs.com](mailto:info.es@fuchs.com)