


High-Tech Protection for Engines



LUBRICANTS.
TECHNOLOGY.
PEOPLE.



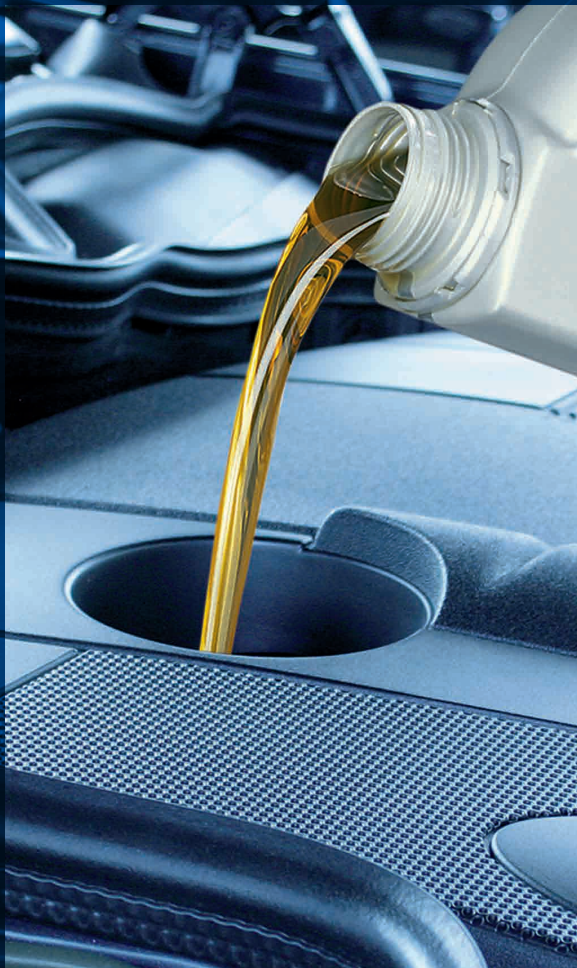

The right high-tech engine oil for every engine!

TITAN engine oils are the result of the latest research and development by the world's largest independent lubricant specialist. Developed together with leading automobile manufacturers, tailored to satisfy the demands of today's high-tech engines, offering outstanding high-performance, fuel-economy and wear protection.

TITAN engine oils: Premium quality from the German automobile industry's leading lubricant OEM. Manufactured in the EU.



FUCHS was the only lubricant supplier presented with the Volkswagen Group Award 2014. Volkswagen recognised FUCHS for innovation, R&D, product quality and competent project management. Benefit from the outstanding experience of one of the leading development-partners and factory-fillers to the German automobile industry. Benefit from FUCHS.

www.fuchs.com/uk

Volkswagen Group Award
Leipzig 2014

FUCHS EUROPE
SCHMIERSTOFFE GMBH

VOLKSWAGEN

www.fuchs.com/uk

TITAN GT1 EVO SAE 0W-20

Premium performance engine oil with new XTL® technology in ground-breaking viscosity class. Specially designed for highly stressed downsized engines with maximum power output.

- maximum fuel-saving potential and reduced CO₂ emissions
- excellent cold starting characteristics
- outstanding performance reserves
- approved for BMW LONGLIFE-14 FE+



Specifications:
ACEA A1/B1

Approvals:
BMW LONGLIFE-14 FE+
JAGUAR LAND ROVER
STJLR.51.5122

FUCHS Recommendations:

–

TITAN GT1 PRO V SAE 0W-20

Premium performance engine oil with new XTL® technology in ground-breaking viscosity class. Specially designed for modern VOLVO vehicles.

- maximum fuel-saving potential
- excellent cold starting behaviour and very fast oil circulation
- outstanding performance reserves
- approved for VOLVO VCC RBS0-2AE



Specifications:
ACEA A1/B1

Approvals:
VOLVO VCC RBS0-2AE

FUCHS Recommendations:

–

TITAN GT1 LONGLIFE IV SAE 0W-20

Premium performance engine oil with new XTL® technology in ground-breaking viscosity class. Specially designed for modern VW vehicles.

- maximum fuel-saving potential of more than 4% in the M111 FE test and reduced CO₂ emissions
- extreme fuel-economy characteristics
- very fast oil circulation
- outstanding performance reserves
- suitable for extended oil change intervals



Specifications:
ACEA A1/B1

Approvals:
VW 508 00/509 00

FUCHS Recommendations:
PORSCHE C20

TITAN GT1 SAE 0W-20

Premium performance engine oil with new XTL® technology in ground-breaking viscosity class and globally unique zinc-free additive technology, for high performance cars with gasoline and diesel engines.

- specially designed for sportive driving and maximum power output
- extreme fuel-economy characteristics
- excellent cold starting behaviour
- outstanding performance reserves



Specifications:

–

Approvals:

–

FUCHS Recommendations:
ACEA C2
API SL
ILSAC GF-4

TITAN GT1 LL-12 FE SAE 0W-30

Premium performance engine oil with new XTL® technology. Specially developed for latest BMW gasoline and diesel vehicles with exhaust after treatment.

- excellent cold starting
- lower oil consumption
- outstanding performance reserves



Specifications:
ACEA C2

Approvals:
BMW LONGLIFE-12 FE

FUCHS Recommendations:
–

TITAN GT1 SAE 0W-30

Premium performance, fuel-economy engine oil for modern passenger cars and light commercial vehicles. Specially developed for latest PSA gasoline and diesel vehicles with exhaust after treatment and turbocharger.

- excellent cold starting
- lower oil consumption
- minimised exhaust emissions



Specifications:
ACEA C2

Approvals:
PSA B71 2312

FUCHS Recommendations:
FIAT 9.55535-DS1/GS1
IVECO 18-1811 CLASSE SC1 LV

TITAN GT1 PRO FLEX SAE 5W-30

Premium performance, extreme fuel-economy engine oil with new XTL® technology. Specially developed for BMW, MERCEDES-BENZ and OPEL vehicles with exhaust after treatment and turbocharger.

- best cold starting characteristics
- significantly lower fuel and oil consumption
- outstanding performance reserves for modern vehicles with or without extended service intervals



Specifications:
ACEA C3; API SN/SM

Approvals:
BMW LONGLIFE-04
dexos2™ (GB2C0209075)
MB-APPROVAL 229.51/229.52
VW 502 00/505 00/505 01

FUCHS Recommendations:
FIAT 9.55535-S3; FORD M2C917-A
GM-LL-A-025; GM-LL-B-025

TITAN GT1 PRO C-3 SAE 5W-30

Premium performance, extreme fuel-economy engine oil with new XTL® technology. Specially developed for BMW, VW and MERCEDES-BENZ vehicles with exhaust after treatment and turbocharger.

- for optimum cold start ability
- significantly lower fuel and oil consumption
- improved ageing stability
- outstanding performance reserves



Specifications:
ACEA C3; API SN

Approvals:
BMW LONGLIFE-04
MB-APPROVAL 229.51
PORSCHE C30
VW 504 00/507 00

FUCHS Recommendations:
FIAT 9.55535-S3

TITAN

GT1 PRO 229.6

SAE 5W-30

Premium performance, extreme fuel-saving engine oil of the top class with new XTL[®] technology especially for modern MERCEDES-BENZ gasoline vehicles.

- reduced fuel consumption by 2.7% compared to the reference in the M111 test
- lower CO₂ emissions
- lower oil consumption
- improved aging stability

TITAN

GT1 PRO C-1

SAE 5W-30

Premium performance, extreme fuel-economy engine oil for modern passenger cars and light commercial vehicles with or without extended service intervals. Specially developed for vehicles with exhaust after treatment and turbocharger.

- optimal for modern passenger cars and light commercial vehicles with or without extended service intervals
- optimum cold starting and lower oil consumption
- minimised exhaust emissions

TITAN

GT1 PRO C-2

SAE 5W-30

Premium performance, extreme fuel-economy engine oil for modern passenger cars and light commercial vehicles with or without extended service intervals. Specially developed for PSA vehicles with exhaust after treatment and turbocharger.

- optimal for modern passenger cars and light commercial vehicles with or without extended service intervals
- optimum cold starting and lower oil consumption
- minimised exhaust emissions

TITAN

GT1 PRO C-4

SAE 5W-30

Premium performance, extreme fuel-economy engine oil for modern passenger cars and light commercial vehicles with or without extended service intervals. Specially for RENAULT engines with exhaust after treatment and turbocharger.

- optimal for modern passenger cars and light commercial vehicles with or without extended service intervals
- optimum cold starting and lower oil consumption
- minimised exhaust emissions



Specifications:
ACEA A5/B5

Approvals:
MB-APPROVAL 229.6

FUCHS Recommendations:
–



Specifications:
ACEA C1

Approvals:
JAGUAR LAND ROVER
STJLR.03.5005

FUCHS Recommendations:
JASO DL-1
FORD WSS-M2C934-B



Specifications:
ACEA C2; API SN/SM

Approvals:
PSA B71 2290

FUCHS Recommendations:
API CF
FIAT 9.55535-S1
IVECO 18-18111 CLASSE SC1



Specifications:
ACEA C4

Approvals:
MB-APPROVAL 226.51
RENAULT RN0720

FUCHS Recommendations:
–

TITAN GT1 SAE 5W-40

Premium performance, fuel-economy engine oil with new XTL® technology for optimum cold start ability and outstanding performance reserves. For modern passenger cars and light commercial vehicles with or without extended service intervals.

- best cold starting characteristics
- significantly lower fuel consumption
- outstanding performance reserves
- specially developed for vehicles with exhaust after treatment and turbocharger



Specifications:
ACEA C3; API SN/SM
FORD M2C917-A

Approvals:
BMW LONGLIFE-04
MB-APPROVAL 226.5/229.31
PORSCHE A40
RENAULT RN0700/RN0710
VW 502 00/505 00/505 01

FUCHS Recommendations:
API CF; FIAT 9.55535-S2

TITAN Supersyn LONGLIFE PLUS SAE 0W-30

Ultra high performance, extreme fuel-economy engine oil formulated with fully synthetic base oil for VW engines. Specially developed for VW LONGLIFE technology. For all passenger car gasoline and diesel engines with or without pump injector technology.

- suitable for gasoline and diesel car engines with or without unit injector technology
- highly stable lubricating film and thus outstanding lubrication at high temperatures such as in stop-and-go traffic in hot summers
- excellent fuel economy and significantly reduced cold-start wear



Specifications:
–

Approvals:
VW 503 00/506 00/506 01
FUCHS Recommendations:
ACEA A5/B5
BMW LONGLIFE 01-FE

TITAN Supersyn LONGLIFE SAE 0W-30

Ultra high performance, extreme fuel-economy engine oil for a variety of vehicles with or without extended service intervals.

- excellent cold starting characteristics
- lower oil consumption



Specifications:
ACEA A3/B4
API SL

Approvals:
MB-APPROVAL 229.5
VW 502 00/505 00

FUCHS Recommendations:
BMW LONGLIFE-01

TITAN Supersyn LONGLIFE SAE 0W-40

Ultra high performance, fuel-economy engine oil for a variety of vehicles with or without extended service intervals.

- excellent cold starting characteristics
- lower oil consumption



Specifications:
ACEA A3/B4
API SN

Approvals:
BMW LONGLIFE-01
MB-APPROVAL 229.5
PORSCHE A40; VW 502 00/505 00

FUCHS Recommendations:
FORD M2C937-A

TITAN

Supersyn LONGLIFE

SAE 5W-40

Ultra high performance, fuel-economy engine oil for a variety of vehicles with or without extended service intervals.

- optimum cold starting characteristics
- lower oil consumption
- high thermal stability



Specifications:
ACEA A3/B4; API SN/SM

Approvals:
BMW LONGLIFE-01
MB-APPROVAL 226.5/229.5
PORSCHE A40
RENAULT RN0700/RN0710
VW 502 00/505 00

FUCHS Recommendations:
API CF; GM-LL-B-025
PSA B71 2296

TITAN

Supersyn FE

SAE 0W-30

Ultra high performance, fuel-economy engine oil for a variety of vehicles with or without extended service intervals.

- excellent cold starting properties
- low oil consumption



Specifications:
ACEA A5/B5

Approvals:
VOLVO VCC 95200377

FUCHS Recommendations:
RENAULT RN0700

TITAN

Supersyn G

SAE 5W-30

Ultra high performance, extreme fuel-economy engine oil especially developed for OPEL/GM extended service intervals.

- optimum cold starting
- lower oil consumption



Specifications:
ACEA A3/B4; API SL/CF

Approvals:
–

FUCHS Recommendations:
GM-LL-A-025
GM-LL-B-025

TITAN

Supersyn F Eco-FE

SAE 0W-30

Ultra high performance, extreme fuel-economy engine oil especially developed for modern FORD Diesel engines.

- excellent cold starting properties
- lower oil consumption
- potential for reduced CO₂ emissions
- suitable for extended oil change intervals
- optimum wear protection



Specifications:
ACEA C2

Approvals:
FORD M2C950-A

FUCHS Recommendations:
–

TITAN Supersyn F Eco-B SAE 5W-20

Ultra high performance, extreme fuel-economy engine oil especially developed for FORD EcoBoost gasoline engines.

- optimum cold starting
- lower oil consumption

TITAN Supersyn F Eco-DT SAE 5W-30

Ultra high performance, extreme fuel-economy engine oil especially suitable for FORD DuraTorq-Diesel engines.

- optimum cold starting
- lower oil consumption

TITAN Supersyn SAE 5W-40

Ultra high performance, fuel-economy engine oil for a variety of vehicles with or without extended service intervals.

- optimum cold starting
- lower oil consumption

TITAN SYN MC SAE 10W-40

Super high performance, fuel-economy engine oil based on MC-synthesis for a variety of gasoline and diesel engines in passenger cars.

- lower oil consumption



Specifications:

ACEA A1/B1
API SN

Approvals:

FORD M2C948-B
JAGUAR LAND ROVER
STJLR.03.5004

FUCHS Recommendations:

CHRYSLER MS 6395
FORD M2C925-A
FORD M2C925-B

Specifications:

ACEA A1/B1/A5/B5
API SL; FORD M2C913-C

Approvals:

FORD M2C913-D
JAGUAR LAND ROVER STJLR.03.5003

FUCHS Recommendations:

API CF; CHRYSLER MS 6395;
FORD M2C913-A/M2C913-B;
IVECO 18-1811 CLASSE S1/S2;
JAGUAR M2C913-B; RENAULT RN0700

Specifications:

ACEA A3/B4; API SN/SM

Approvals:

MB-APPROVAL 229.3
PORSCHE A40
RENAULT RN0700/RN0710
VW 502 00/505 00

FUCHS Recommendations:

API CF; BMW LONGLIFE-98
FIAT 9.55535-H2/M2/N2/Z2
GM-LL-A-025; GM-LL-B-025

Specifications:

ACEA A3/B4; API SN

Approvals:

MB-APPROVAL 229.1
MB-APPROVAL 229.3
PSA B71 2300
RENAULT RN0700/RN0710
VW 502 00/505 00

FUCHS Recommendations:

API CF
FIAT 9.55535-D2/G2

Note

The information contained in this product information is based on the experience and know-how of FUCHS LUBRICANTS in the development and manufacturing of lubricants and represents current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pre-treatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. Our products must not be used in aircrafts / spacecrafts or their components, unless such products are removed before the components are assembled into the aircraft /spacecraft. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS LUBRICANTS application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care.

Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

Any form of reproduction requires express prior written permission from FUCHS LUBRICANTS. © FUCHS LUBRICANTS. All rights reserved.

Contact:

FUCHS LUBRICANTS (UK) plc
New Century Street,
Hanley, Stoke on Trent,
ST1 5HU
Phone: +44 (0)1782 203 700
E-mail: contact-uk@fuchs-oil.com
www.fuchs.com/uk