

AGRIFARM | PLANTO | RENOLIT

Lubricants for Agriculture



MOVING YOUR WORLD



A white sports car is shown from the rear, driving on a road that curves through a landscape. In the background, several large wind turbines are visible, and a prominent, snow-capped mountain rises against a blue sky with scattered white clouds. The scene is captured with a slight motion blur, suggesting the car is moving quickly.

FUCHS LUBRICANTS

Keeping the world moving, that is what drives us. We don't just develop lubricants; we develop efficient and sustainable lubrication solutions.

We partner with our customers, provide insights and move their world - with unconditional reliability. It is the basis of our work, aspiration, and promise, both internally and externally.

What can we move for you?



FUCHS LUBRICANTS

Facts and figures

Company: FUCHS LUBRICANTS (UK) plc, a company of the FUCHS Group

UK manufacturing site: Hanley, Stoke-on-Trent

Certifications: ISO 9001, IATF 16949, EN 9100, ISO 14001, ISO 50001 and ISO 45001

(detailed certifications at www.fuchs.com/uk)

CO₂ neutral production*

Since 1931, we have been pursuing the same goal: to keep the world moving. With innovative and technological lubricant solutions that have a sustainable impact on the future. Unconditional reliability is our top priority, it is the foundation of our company and basis for everything that defines us.

Reliability is both a driver and a demand. And it's a promise to all our customers in the fields of automotive suppliers and OEMs, mechanical engineering, metal processing, mining and exploration, aerospace, energy, construction and transport, agriculture and forestry, as well as the paper, steel, metal, cement, forging and food industries, but also qualified lubricant dealers, car dealerships and workshops.

Long-term experience, high development strength and the fulfillment of far-reaching standards are the basis for the special quality of our world-leading product brands. We deliver solutions that are simply more efficient and therefore more sustainable. We always think in holistic solutions. For the development of individual solutions, we enter into an intensive customer dialog with you. This is the way we live up to our claim of moving your world.

MOVING YOUR WORLD

*Partially also based on compensation



AGRIFARM

SAFETY IS OUR STRENGTH

With AGRIFARM lubricants, you are placing your trust in a wealth of experience gathered over the course of decades. FUCHS has been active in the agricultural lubricant market for more than 70 years, both as an OEM for machine manufacturers and in the field of workshop services.

The latest innovative lubricants under the AGRIFARM brand secure maximum operational reliability of all agricultural units – from engines and transmissions, right through to hydraulics in all machines and vehicles.

Safety during application

AGRIFARM lubricants have proved extremely successful even under the very toughest conditions and thereby offer the highest level of reliability for your vehicle fleet.

AGRIFARM will make the difference for you

AGRIFARM products are lubricants of the very highest quality made by FUCHS, which meet the latest standards of leading manufacturers in terms of application safety. FUCHS only uses selected base oils and specially developed additives for the manufacturing of AGRIFARM lubricants.

Our expertise guarantees the greatest reliability.

AGRIFARM is the worldwide specialist for high-end lubricants

Agricultural machines must deliver top performance on a daily basis. As a professional, you know how decisive the right oil is for the performance and durability of such a machine. So place your trust in the FUCHS AGRIFARM range of high-tech lubricants.

Noticeably increased oil change intervals in engines and significantly fewer signs of wear are just some of the visible results.

Special lubricants for agriculture

Alongside lubricants that can only be used for a certain component there are also the all-rounders: the STOU and UTTO products that come into use in agricultural applications.

Both were developed for use in transmission and hydraulic systems and can also be deployed in brakes designed to run in an oil bath (wet brakes).

STOU products can also be used in an engine if the respective specifications are met. In other words, a STOU is an UTTO with engine performance. An overview is provided in the table below.

Aggregate	UTTO*	STOU**
Engine (with or without turbocharging)		X
Manual gearboxes	X	X
Gearboxes and gearbox-hydraulic systems with or without integrated wet brakes	X	X
Hydraulic systems	X	X
Final drives	X	X

*UTTO = Universal Tractor Transmission Oil

**STOU = Special Tractor Oil Universal

Limited Slip (LS)

LS lubricants are gear oils for differentials with disc lock, which guarantee perfect functionality and low noise under all loads.

Note

The information contained in this product information is based on the experience and know-how of FUCHS LUBRICANTS in the development and manufacturing of lubricants and represents the current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pre-treatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care. Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

All information correct at time of publication.

Any form of reproduction requires express prior written permission from FUCHS LUBRICANTS. © FUCHS LUBRICANTS. All rights reserved.

FUCHS AGRIFARM makes all the difference

The highest quality and the largest selection – guaranteed

With a broad portfolio of specially developed lubricant solutions, FUCHS AGRIFARM offers optimal all-round protection for your machines.

STOU


AGRIFARM STOU MC PRO SAE 10W-40
AGRIFARM STOU MC SAE 10W-30
AGRIFARM STOU MC SAE 10W-40
AGRIFARM STO SAE 15W-30


Engine

AGRIFARM MOT X-LA SAE 10W-40
AGRIFARM MOT SAE 15W-40
AGRIFARM 4-STROKE SAE 30
PLANTO MOT SAE 10W-40

Greases

RENOLIT MP PLUS
RENOLIT FLM 2
RENOLIT DURAPLEX EP 2
RENOLIT LX-PEP 2
RENOLIT EP-series
RENOLIT LZR 2 H
RENOLIT MO 2
PLANTOGEL ECO 2 S
PLANTOGEL ECO 2 N

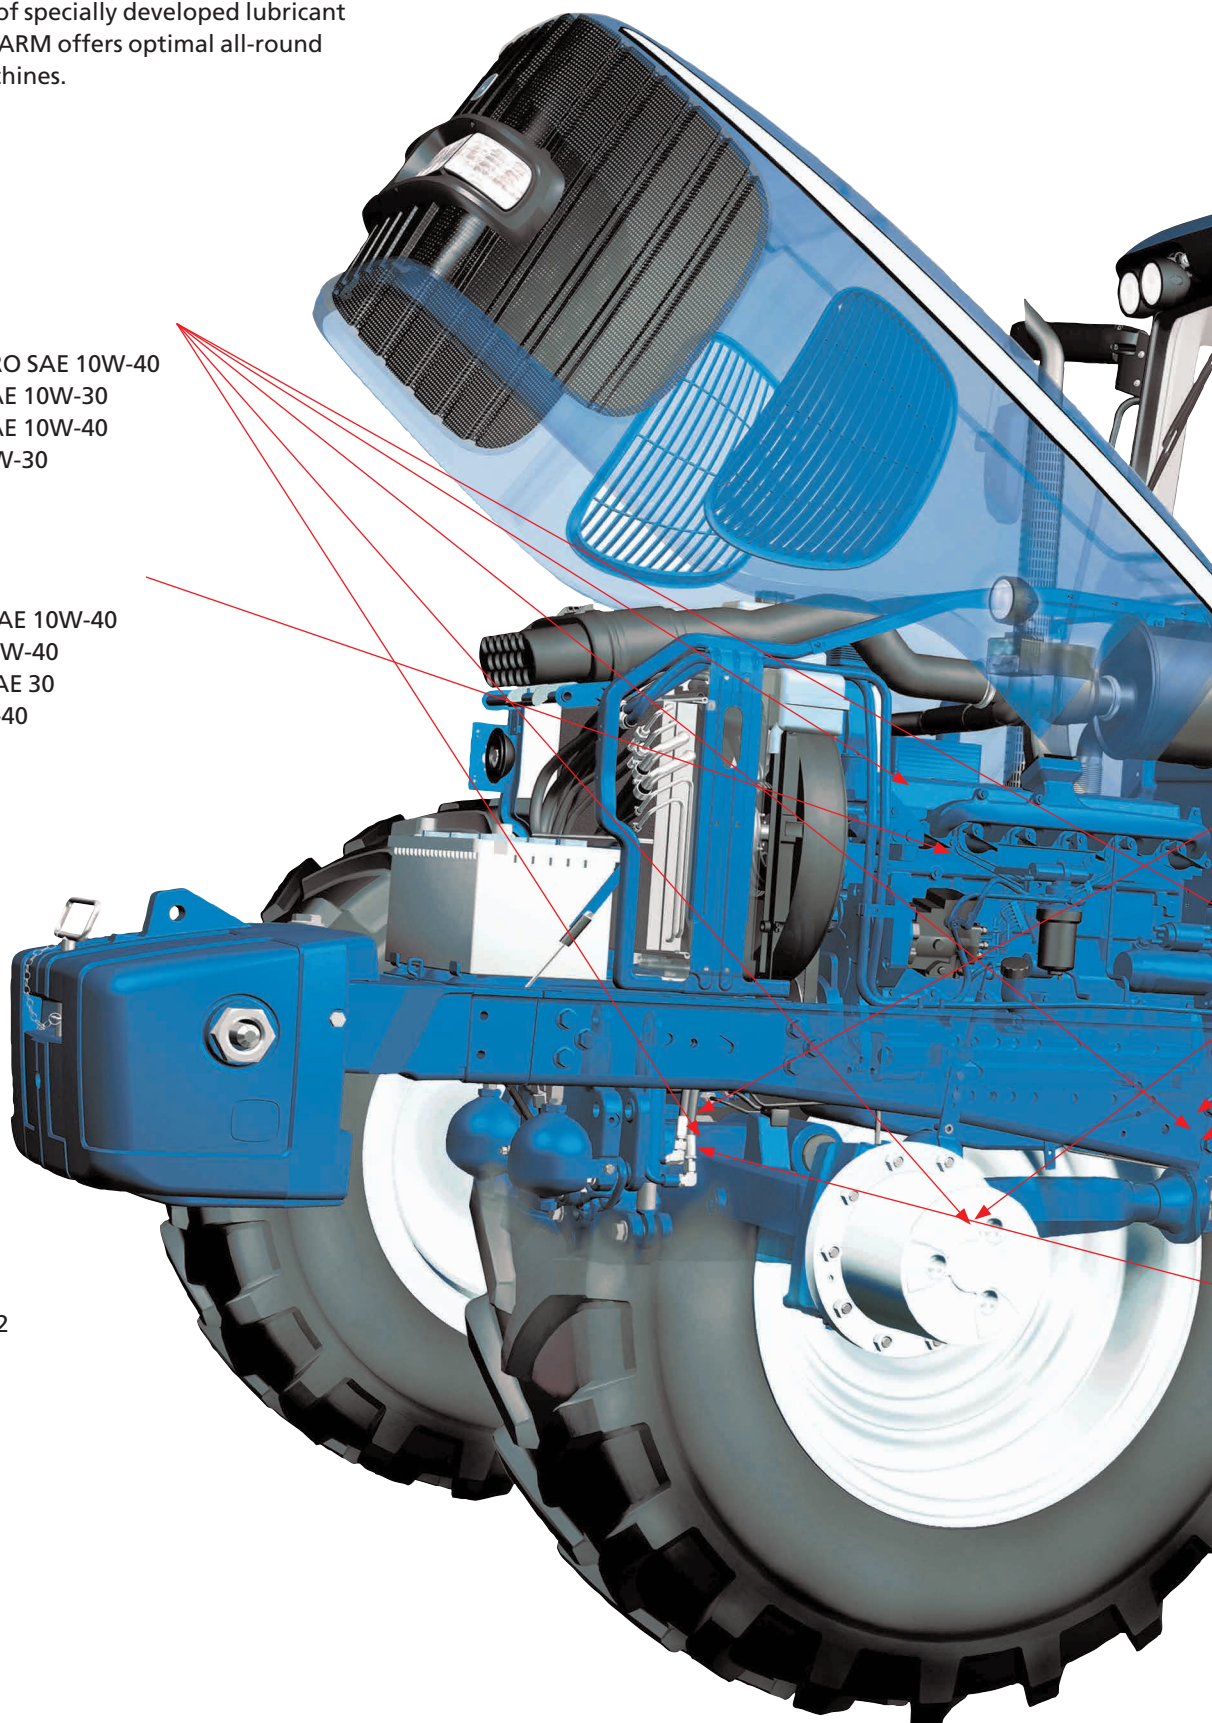

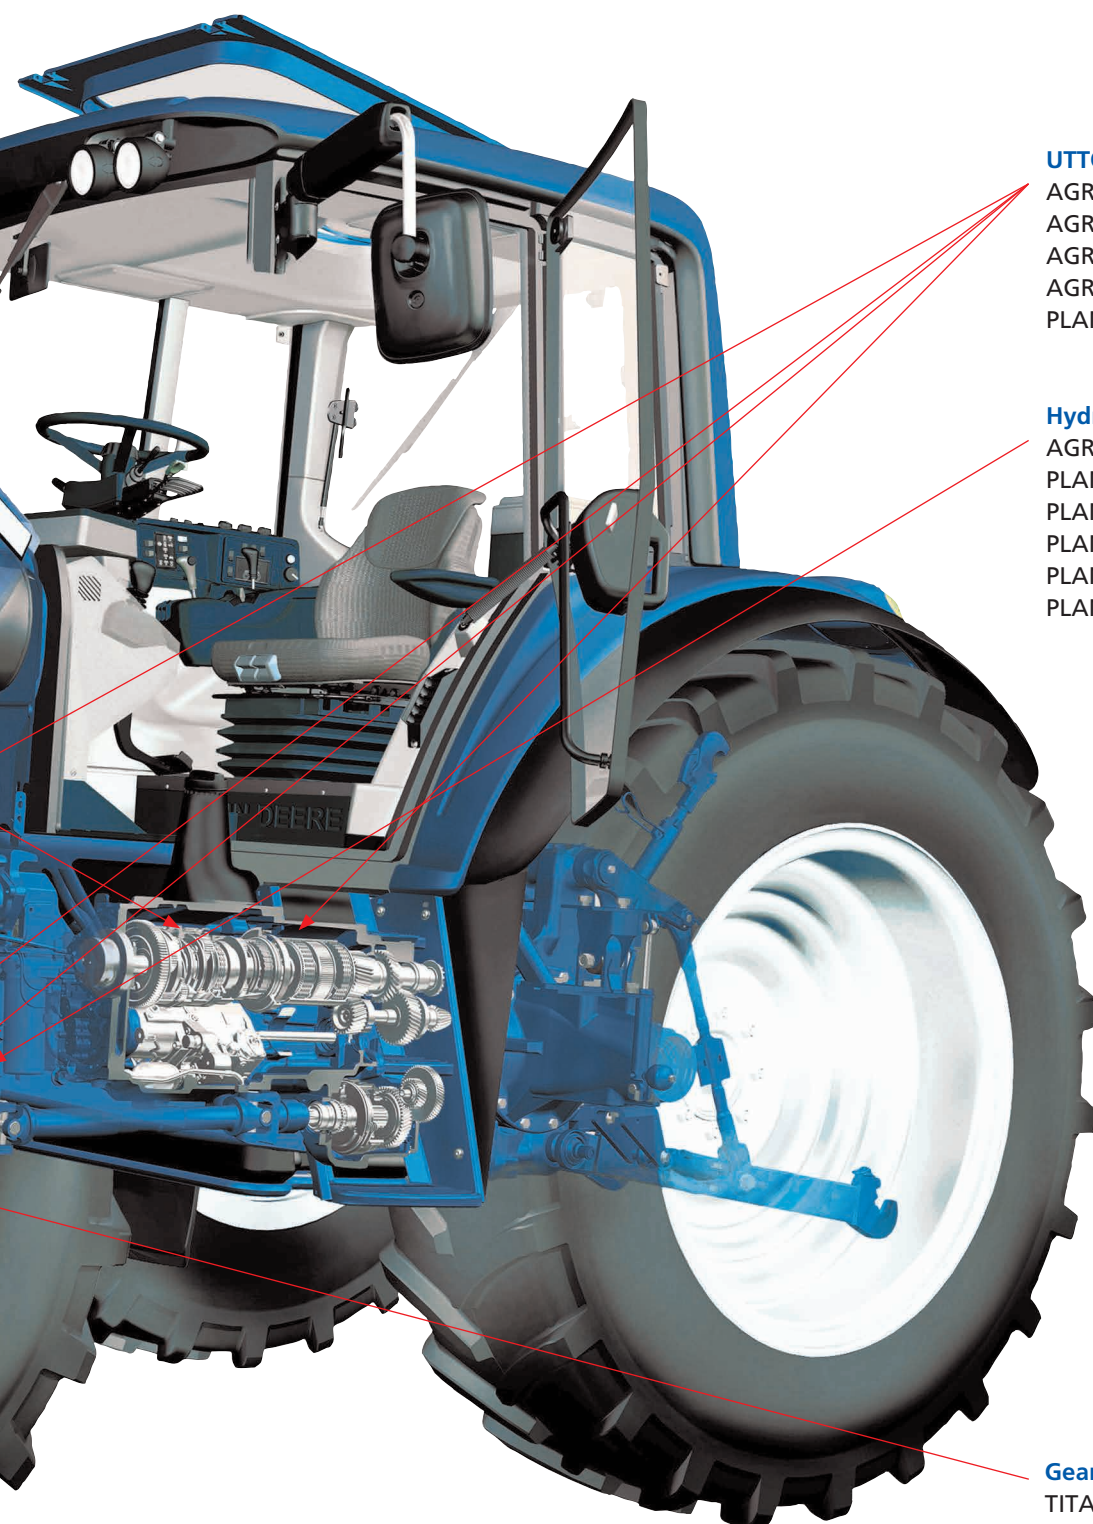

UTTO

AGRIFARM UTTO VT
AGRIFARM UTTO MP
AGRIFARM UTTO LN
AGRIFARM WET BRAKE OIL
PLANTO HYTRAC PLUS

Hydraulic

AGRIFARM UNIVERSAL HV46
PLANTOSYN 3268
PLANTOSYN 3268 ECO
PLANTOSYN 46 HVI
PLANTOHYD S Series
PLANTO ENVIRO Series

Gearbox

TITAN SUPERGEAR MC SAE 80W-90
TITAN SUPERGEAR MC SAE 80W-140
TITAN SUPERGEAR PLUS SAE 80W-90
TITAN SUPERGEAR LS SAE 80W-90

Overview of products

AGRIFARM

Product	Description	Specifications	Approvals	FUCHS Recommendations
AGRIFARM STOU Oils				
AGRIFARM STOU MC PRO SAE 10W-40	Ultra High Performance Multifunctional Oil (STOU/MFO) of the latest generation for agricultural vehicles.	SAE J300: SAE 10W-40	DEUTZ DQC III-10	ACEA E7 (E5/E3), E4, API CI-4, API GL-3/GL-4/API GL-5 in tractors* MAN 3275 AFNOR NFE 48603 HV ALLISON C-4 CASE MS 1207, 1209, 1210, 1230 CNH MAT 3505, 3509, 3525, 3526 DIN 51524-3, HVLP (-D) FNHA 2C-200.00, 201.00 FORD M2C48-C3, M2C86-B, M2C134-D, M2C159-B/C JOHN DEERE JDM J20C NEW HOLLAND 82009201/2/3 NH 030C, 330G, 330H, 410B, 420A, 526C MASSEY FERGUSON CMS M 1145, 1144, 1143, 1139, 1135 SAE J306: SAE 80W-90 ZF TE-ML 06A, 06B, 06C, 06F, 06L, 07B *without HOLMER
AGRIFARM STOU MC SAE 10W-30	MC-Synthesis Super High Performance Multifunctional Oil (STOU/MFO) for engines, manual gearboxes, wet brakes, hydraulics and turbo-drives in tractors and other agricultural machinery.	API GL-4 SAE J300: SAE 10W-30	DEUTZ DQC I-02 ZF TE-ML 06B, 06F, 07B (ZF000733)	AFNOR NFE 48603 HV DIN 51524-3: HVLP (-D) ACEA E3 API CG-4 ALLISON C-4 CASE MS 1207, 1209, 1210, 1230 CNH MAT 3505, 3509, 3525, 3526 FORD M2C48-C3, M2C86-B, M2C134-D, M2C159-B/C JOHN DEERE JDM J20 C NEW HOLLAND 82009201/2/3 NH 410B, 420A MASSEY FERGUSON CMS M 1145, 1144, 1143, 1139, 1135 SAE J306: SAE 75W-80 ZF TE-ML 06A, 06C
AGRIFARM STOU MC SAE 10W-40	Super High Performance Multifunctional Oil (STOU/MFO) based on MC-base-oil technology for engines, manual gearboxes, wet brakes, hydraulics and turbo-drives in tractors and other agricultural and other commercial vehicles.	API GL-4 SAE J300: SAE 10W-40	DEUTZ DQC I-02 FENDT KDM 17/2012 ZF TE-ML 06B, 06F, 07B (ZF000729)	API GL-5 in tractors* ACEA E3 API CG-4, MAN 271 AFNOR NFE 48603 HV ALLISON C-4 CASE MS 1207, 1209, 1210, 1230 CNH MAT 3505, 3509, 3525, 3526 DIN 51524-3: HVLP (-D) FORD M2C134-D, M2C159-B/C FNHA 2C-200.00, 201.00 FORD M2C48-C3, M2C-86 B JOHN DEERE JDM J20C NEW HOLLAND 82009201/2/3 NH 030C, 330G, 410B, 420A, 526C MASSEY FERGUSON CMS M 1145, 1144, 1143, 1139, 1135 SAE J306: SAE 80W-90 ZF TE-ML 06A, 06C, 06L *without HOLMER

Product	Description	Specifications	Approvals	FUCHS Recommendations
AGRIFARM STOU Oils				
AGRIFARM STO PLUS SAE 10W-30	A universal tractor oil suitable for use in most modern tractor engines, transmissions, hydraulics and final drives. Suitable for use in both turbo charged and naturally aspirated engines, and in machines fitted with oil immersed brakes.	–	–	ALLISON C4, CASE NEW HOLLAND MAT 3525, MAT 3526, CCMC D4, FORD M2C 159B/C, 134D, FORD NEW HOLLAND 82009201/2/3, JOHN DEERE J20C, J27 MAN 271, MASSEY FERGUSON M1135, M1139, M1143, M1144, M1145, MIL-L 2104D, 46152B, NEW HOLLAND NH 030 C, NH 024 C, NH 410 B, NH 420 A, ZF TE ML 06B, 06C, 06R, 07B
AGRIFARM STO SAE 15W-30	A multifunctional oil for use in engines, gearboxes, wet brakes and hydraulic systems of older agricultural equipment.	API CD/SF API GL-4	–	ALLISON C3 FORD M2C 159-B JOHN DEERE J20A MASSEY FERGUSON M1135 MASSEY FERGUSON M1139 VICKERS HYDRAULIC
AGRIFARM Engine Oils				
AGRIFARM MOT X-LA SAE 10W-40	Premium Performance Engine Oil for agricultural vehicles. Universal engine oil for application in modern vehicles with exhaust after treatment as well as in older vehicles. Best engine cleanliness and outstanding wear protection.	ACEA E11, E8, E7, E4 API CK-4/CJ-4/CI-4 PLUS/CI-4 CAT ECF-3	DEUTZ DQC IV-18 LA DTFR15C100 (MB 228.31) DTFR15C110 (MB 225.51) DTFR15C120 (MB 228.52)	ACEA E9, E6 CNH MAT 3571, 3521 CUMMINS CES 20086, 20081 Liebherr LH-00-ENG LA MACK EOS-4.5 MAN M 3477, M 3575 MAN M 3775 MB 228.52, MB 228.51 MB 228.31 RENAULT RLD-4, RLD-3
AGRIFARM MOT LA SAE 15W-40	Ultra High Performance Engine Oil for agricultural vehicles. Specially developed for engines with extended service intervals, exhaust after treatment systems and turbocharger. Universal use in new as well as in older vehicles.	ACEA E9 API CK-4/CJ-4	–	CUMMINS CES 20086 DEUTZ DQC III-10 LA MAN M 3775 MAN M 3575 MTU DDC TYPE 2.1
AGRIFARM MOT SAE 15W-40	Super High Performance Engine Oil for normally aspirated and turbocharged diesel engines in tractors and other machinery which make high demands on service intervals and engine cleanliness.	ACEA E7 API CI-4/SL GLOBAL DHD-1 CAT ECF-1-a/ECF-2	DEUTZ DQC III-10 MB-APPROVAL 228.3	ALLISON C-4, CAT TO-2, CASE MS 1121 CUMMINS CES 20071/2/6/7/8 DETROIT DIESEL 93K215 IVECO 18-1804 CLASSE T2 E7 MACK EO-N, MAN M 3275-1, MAN 3575 MTU DDC TYPE 2, NH 330H RENAULT RLD/RLD-2 STEYR A-201, VOLVO VDS-3
AGRIFARM 4-STROKE 30	A high performance SAE 30 mineral oil based monograde engine oil. Suitable for use in certain 4-stroke petrol and diesel engines.	API CF/SG	–	MAN 270 MB 227.0 / 228.0

AGRIFARM overview of products

Product	Description	Specifications	Approvals	FUCHS Recommendations
AGRIFARM UTTO Oils				
AGRIFARM UTTO VT	Ultra High Performance Multifunctional Oil (UTTO/MFO) for use in transmission and hydraulic systems with integrated wet brakes, clutches and differentials for agricultural and construction machinery.	API GL-4	ZF TE-ML 06B, 06D, 06N, 07B (ZF002035)	ACEA E2, API CF-4/CG-4/SF ALLISON C-4, CAT TO-2 FORD M2C159-B/C JOHN DEERE JDM J20C, JDM J27 MASSEY FERGUSON CMS M 1145 (1144, 1143, 1139, 1135) SAE J300: 10W-30, SAE J306: 80W-80 ZF TE-ML 06C, 06F, 06Q, 06R
AGRIFARM UTTO MP	Super High Performance Multifunctional Oil (UTTO/MFO) for use in transmission and hydraulic systems with integrated wet brakes, clutches and differentials for agricultural and construction machinery.	API GL-4	ZF TE-ML 03E, 05F, 06K, 17E, 21F (ZF002183)	AGCO Powerfluid 821 XL AGCO Q-186 (Whitefarm) ALLISON C-4, CASE MS 1230, 1210, 1209, 1207, 1206 CLAAS/LANDINI/SAME-Transmission CNH MAT 3505, 3506, 3509, 3525, 3526, 3540 FNHA-2-C-200.00/-201.00 FORD M2C48-C3, ESN M2C86-B/C, M2C134-D, JOHN DEERE JDM J20C KUBOTA UDT FLUID MASSEY FERGUSON CMS M 1145, 1143, 1141, 1135, NH 410B SAE J306: 75W-80, SAE J300: 10W-30 SDFG OT 1891 A, VALTRA G02-08
AGRIFARM UTTO LN NEW	Ultra High Performance Transmission Hydraulic Fluid developed as a problem-solver for tractors in which conventional UTTO oils led to noisy wet brakes.	API GL-4 SAE J300: 20W-30	—	AGCO Powerfluid 821 XL AGCO Q-186 (Whitefarm) ALLISON C-4 CASE MS 1206, 1207, 1209, 1210, 1230 CNH MAT 3505, 3506, 3509, 3525, 3526 FNHA-2-C-200.00 / -201.00 FORD M2C48C3, ESN M2C86-B/C, M2C134-D JOHN DEERE JDM J20C MASSEY FERGUSON CMS M 1141, 1135 SAE J306: 80W-85 CLAAS /LANDINI/SAME-Transmission DEUTZ-FAHR FENDT (non Vario)
AGRIFARM WET BRAKE OIL	A 15W-30 Universal Tractor Transmission oil (UTTO) for use in older agricultural equipment where the specifications quoted are required. Can help quieten noisy brakes.	SAE 15W-30	—	FORD M2C86-B, M2C86-C JOHN DEERE J20A MASSEY FERGUSON M1135

FUCHS Oil Chooser



Direct link to
FUCHS Oil
Chooser

It could hardly be easier: Our Oil Chooser can be found at www.fuchs.com/uk

- Simply choose your vehicle type and select the make and model
- A window appears with an overview of the optimum lubricants for your vehicle
- All you have to do is click on the appropriate application and you will be shown the product you require

Product	Description	Specifications	Approvals	FUCHS Recommendations
Agricultural Specialities				
AGRIFARM ATV 10W-40	High Performance all-season, 4-stroke engine oil designed for All Terrain Vehicles (ATV) and Quadbikes especially for use in demanding agricultural applications.	–	–	JASO MA2 / MA API SN ACEA A3/B4
AGRIFARM CHAINSAW OIL MEDIUM	A high viscosity, extremely tacky oil for use in pressure fed chainsaws. Excellent anti-fling properties, reduces chain wear and protects from corrosion.	–	–	–
AGRIFARM MILKING MACHINE OIL	Ultra High Performance Milking Machine Oil specially developed for use in the vacuum pumps of milking machines. It contains additives which protect against wear and corrosion and foaming. These features increase the functional reliability of such systems.	–	–	ALFA LAVAL WESTFALIA
AGRIFARM UNIVERSAL 2-STROKE OIL	A super high performance 2-stroke engine oil. Ideal for agricultural and horticultural machinery, chain saws, hedge cutters, trimmers, portable generators, etc.	API TC JASO FB	–	–
AGRIFARM UNIVERSAL HV46	A premium quality multipurpose multigrade hydraulic oil for use in hydraulic systems on tractors, combine harvesters and other agricultural applications. Good antiwear, antifoam, antirust and antioxidant properties ensure long oil life.	DIN 51 524-3 HVLP ISO 6743-4 HV	–	DENISON HF-O
TITAN SUPERGEAR MC SAE 80W-90	Ultra High Performance Gear Oil based on MC-Synthesis for extended oil change intervals.	API GL-4/GL-5	DTFR 12B100 (MB 235.0) EvoBus 26.000-032 EvoBus 26.000-034 MAN 341 TYPE Z2 MAN 342 TYPE M2 MB-APPROVAL 235.0 SCANIA STO 1:0 SCANIA STO 1:1 G ZF TE-ML 02B, 05A, 12L, 12M, 16B, 17H, 19B, 21A (ZF000722)	API MT-1 CASE MS 1316 FORD WSP-M2C197-A JOHN DEERE JDM J11E MAN M 3343 TYPE M MAN 341 TYPE E2 NH 520A SDFG OP 1705 STEYR B-101 VOLVO 97310 ZF TE-ML 07, 08
TITAN SUPERGEAR MC SAE 80W-140	Ultra High Performance Gear Oil based on MC-Synthesis for extended oil change intervals.	API GL-4/GL-5	SCANIA STO 1:0 ZF TE-ML 05A, 12M, 16C, 21A (ZF006028)	API MT-1 JOHN DEERE JDM J11E OPEL 19 42 386, RENAULT VI, VOLVO 97310, ZF TE-ML 08
TITAN SUPERGEAR PLUS SAE 80W-90	Ultra High Performance Gear Oil for extended oil change intervals.	API GL-4/GL-5 SAE J2360	MAN 342 TYPE M2 MB-APPROVAL 235.6 VOLVO 97321 ZF TE-ML 05A, 07A, 08, 12E, 16B, 16C, 17B, 19B, 21A (ZFXXXXXX)	MB 235.0 MIL-L-2105 D/E VOLVO 97310 NH 520A STEYR B-101
TITAN SUPERGEAR LS SAE 80W-90	High Performance LS hypoid gear oil for axles with or without limited slip differentials.	API GL-5 SAE J306: 80W-90	ZF TE-ML 05N, 21N (ZF008289)	MIL-L-2105 D FORD M2C104-A JOHN DEERE JDM J11F NH 520B, VOLVO 97310

PLANTO **REAL BIOGENIC LUBRICANTS**



Forests, fields and grasslands are highly sensitive ecosystems and their modern utilization has long had to be economically viable.

Virtually all vehicles operate outdoors in one way or another, carrying all manner of resources on board such as fuels, lubricants and antifreeze. This presents a not inconsiderable danger to us and our environment in the event of a spillage or accident.

These dangers can be avoided by using special lubricants. FUCHS focuses on sustainability and economic efficiency and for this reason offers a multitude of rapidly biodegradable products for your applications.

Overview of products

PLANTO

Product	Description	Specifications	Approvals	FUCHS Recommendations
Rapidly Biodegradable Lubricants				
PLANTO MOT SAE 10W-40	Low-ash diesel engine oil for modern diesel engines. Biodegradable and especially recommend for use with alternative diesel fuels.	–	DEUTZ DQC IV-18 LA	ACEA E9/E7/E6, API CK-4, CAT ECF-3 CUMMINS CES 20086 DETROIT DIESEL 93K222 JASO DH-2, MACK EOS-4.5 MAN M 3271-1 / 3477, MB 228.51, MTU TYPE 3.1, RENAULT RLD-3/ RLD-4, VOLVO VDS-4.5
PLANTOSYN 3268* EU Ecolabel DE/027/149	Environmentally Friendly, HVI Multigrade Hydraulic Oil with high temperature stability based on fully-saturated, synthetic esters (HEES), rapidly biodegradable according to OECD 301 B >60 %, awarded with the EU Ecolabel.	ISO 15380: HEES DIN 51524-3: HVLP DIN 51519: ISO VG 46 EU Ecolabel: DE/027/149	FENDT KDM 28/2006 O&K BAUMASCHINEN	BOSCH REXROTH AG CAT BF-1 KRAMER ALLRAD PALFINGER TIMBERJACK SAUER DANFOSS VALMET/KOMATSU FOREST, PONSSE
PLANTO HYTRAC PLUS	Biodegradable Super High Performance Multifunctional Oil (UTTO) for tractor gearboxes with or without wet brakes.	SAE 10W-30 SAE 80	–	CASE MS 1207, 1209, FORD M2C134-D JOHN DEERE JDM J20C NEW HOLLAND NH 410 B MASSEY FERGUSON CMS M1127, 1135, 1143 HLP/HVLP ISO VG 32, 46, 68, 100 (according to DIN 51 524-2 /-3)
PLANTO TAC 68* EU Ecolabel DE/027/112	Biodegradable Super High Performance Chain Saw Oil based on rapeseed. For professional use in chain saws. Excellent lubricity and good ageing stability, awarded with the EU Ecolabel.	–	ECOLABEL	HUSQVARNA STIHL SOLO DOLMAR and others
PLANTOGEL ECO 2 S* (based on synthetic esters) EU Ecolabel DE/027/114	Environmentally Friendly, Readily Biodegradable EP Grease based on lithium soap and synthetic esters for the lubrication of plain and roller bearings. Good pumpability in central lubrication systems, awarded with the EU Ecolabel, NLGI 2, -40 °C to +120 °C.	EU ECO LABEL DE/027/273 ISO 12924: ISO-L-XD(L) CEB 2	ECOLABEL	–
PLANTOGEL ECO 2 N* (based on rape oil) Also available in NLGI grade 1. EU Ecolabel DE/027/113	Environmentally Friendly, Readily Biodegradable Total Loss Lubricating Grease based on calcium soap and rape seed oil, awarded with the EU Ecolabel, NLGI 2, -20 °C to +70 °C.	–	ECOLABEL	–
PLANTOSYN 46 HVI	Environmentally friendly, high performance multigrade hydraulic oil based on saturated synthetic esters.	ISO 15380: HEES European Ecolabel (EEL)	ISO VG 46	–
PLANTOHYD S SERIES*	Environmentally friendly, high performance multigrade hydraulic oils based on synthetic esters.	ISO 15380: HEES European Ecolabel (EEL)	ISO 15, 22, 32, 46 and 68	–
PLANTO ENVIRO SERIES	Environmentally friendly, high performance hydraulic oils based on synthetic esters.	ISO 15380: HEES EEL 2005/360/EG	ISO VG 32 and 46	–



RENOLIT LUBRICATING GREASES FOR YOUR UNITS

Lubricating greases are consistent lubricants made up of base oil and a specially chosen thickener. To increase certain properties, additives are added to the lubricating greases.

Lubricating greases are structural elements, especially when used as long-life lubricants for lifetime lubrication.

RENOLIT lubricating greases are a balanced and complete package offering the ideal technical and economical solution in the largest possible number of lubricating grease applications in agriculture.

Overview of products

RENOLIT

Product	Description	Specifications	Approvals	FUCHS Recommendations
Greases				
RENOLIT MP PLUS Only available for use in FUCHS system grease guns.	High Performance multipurpose EP Grease for plain and roller bearings with excellent adhesion, good corrosion protection and very good ageing stability, NLGI 2, -30 °C to +120 °C.	KP 2 K-30 ISO-L-X-CCEB 2	–	–
RENOLIT FLM 2 Also available for use in FUCHS system grease guns. Also in NLGI grade 0 available.	EP Grease based on lithium soap and mineral oil, containing molybdenum disulphide (MoS ₂). For the lubrication of commercial vehicles and machinery. NLGI 2, -30 °C to +140 °C.	KPF 2 N-30 ISO-L-X-CDEB 2	MAN 285 Li-PF 2	–
RENOLIT DURAPLEX EP 2 Also available for use in FUCHS system grease guns. Also in NLGI grade 1 and 3 available.	EP High Temperature Multipurpose Grease for the long-term lubrication of plain and roller bearings, such as vehicle clutch-release bearings, highly-stressed construction machinery bearings, etc., NLGI 2, -30 °C to +160 °C.	–	–	–
RENOLIT LX-PEP 2 Also in NLGI grade 1-2 and 3 available.	Special Grease based on lithium complex soaps for long-life applications. Good corrosion protection, thermally and mechanically stable, specially suitable for wheel bearings of cars and trucks, -30 °C to +150 °C.	KP 2 N-30 ISO-L-X-CDEB 2	MAN 284 Li-H 2 MB-APPROVAL 265.1 SCHAEFFLER DB-Kenndatenblatt 873 499 ZF TE-ML 12 VW TL 52147X INTERPRECISE	–
RENOLIT EP-SERIES	Standard, Multipurpose Greases based on lithium soap for the general lubricating of machines, NLGI 000, 00, 0, 1 and 2, -30 °C to +160 °C.	–	–	–
RENOLIT LZR 2 H	Highly Adhesive, Premium Performance-quality, Long-life EP Grease based on lithium soap for all plain and roller bearings as well as central lubrication systems in commercial vehicles and general machinery. Excellent corrosion protection even in the presence of saltwater, NLGI 2, -30 °C to +140 °C.	KP 2 N-30 ISO-L-X-CDIB 2	Central lubrication system of BAIER & KÖPPEL LINCOLN and SKF Lubrication Solutions	–
RENOLIT MO 2	A multipurpose lithium based grease with the addition of molybdenum disulphide and other additives to aid boundary lubrication and reduce fretting wear and corrosion.	NLGI 2	–	–

Innovative lubricants need experienced application engineers

Every lubricant change should be preceded by expert consultation on the application in question. Only then can the best lubricant system be selected. Experienced FUCHS engineers will be happy to advise on products for the application in question and also on our full range of lubricants.


Contact:



FUCHS LUBRICANTS (UK) plc,
New Century Street, Hanley,
Stoke on Trent, ST1 5HU
Phone: +44 (0) 1782 203700
E-Mail: contact-uk@fuchs.com
www.fuchs.com/uk

 [/fuchslubricantsuk](https://www.facebook.com/fuchslubricantsuk)

 [@fuchslube_uk](https://twitter.com/fuchslube_uk)

 [/fuchs-lubricants-uk-plc](https://www.linkedin.com/company/fuchs-lubricants-uk-plc)